





FM clutch switch override

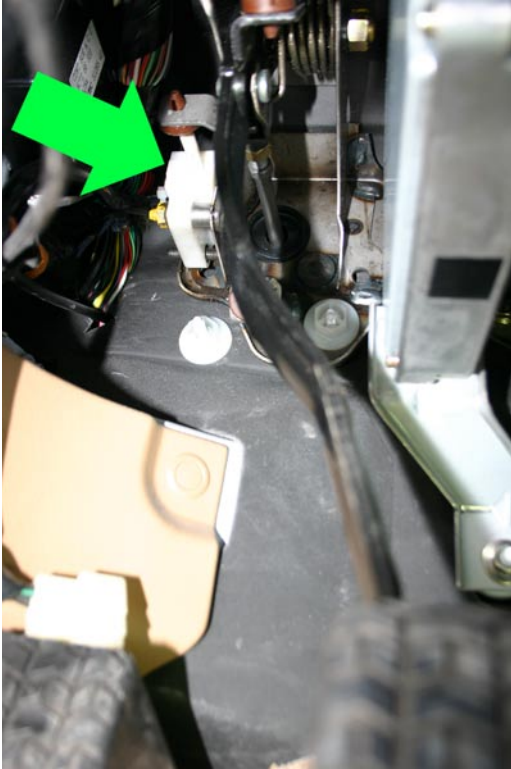


Installation of the clutch switch override should only take a few moments, but it is awkward. No tools are required. Keep in mind that once the override is installed, your Miata will start even if it is in gear. Always make sure the car is in neutral before trying to start the car.


Begin by finding the starter interlock switch on the clutch. It's the lower white switch on the clutch, indicated at left by a big green arrow. You'll have to get your head into the footwell of the car to do this.



The override clip will slip over this switch, sitting on top. It's shown in green in the diagrams. Hook one end of the clip over the plunger on the switch as shown, and hold it in place with your thumb.

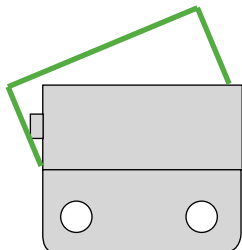

Push the plunger in with your thumb, taking the clip with it.



Once the plunger is fully depressed, push upwards slightly on the clip and it should slip into place. There! You're done.